



Prepare Yourself

A Phillips Screw Driver or Cordless Drill
Good Quality Metal Tape Measure

Pencil
Step Ladder

What's Included

Brackets and Screws
Cleat

Fixing into Plaster


If you are installing on plaster or wallboard, where possible, use a stud finder to fix into the timber stud. Alternatively, use a suitable wall mate or plaster toggle if you are unable to locate the stud.

Installing The Blind

1. Brackets are to be positioned approximately 100mm from each end of the blind. Any other brackets should be positioned evenly between the end brackets.


2. Use a pencil to mark the bracket positions and then screw through the top of each bracket into either the recess of the window frame where marked, or the front of the window frame for a face fit.

3. To install the blind, hold the blind underneath the brackets and position the front lip of the head rail over the front hooks of the brackets.

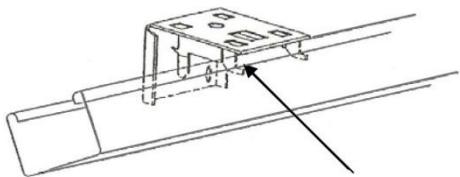

Hook in the front edge of the Blind first

4. Gently push back on the headrail and get the rear of the headrail to hook under the rear lip of the bracket. With larger blinds you may need to work from the right side and to the left.

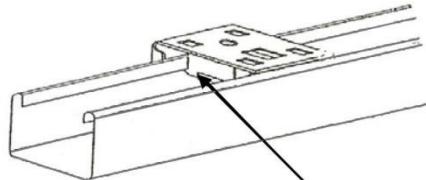

Push the Blind up into the rear bracket hooks

Hold Down Clips

Fit hold down clips if desired. Fully lower the blind to determine the position of the hold down clips at the base of the window. Secure the hold down clips with the screws provide.


Note: Make sure that the blades are in the open position when the blind is being raised or lowered. Failure to do so may cause damage to the blind or restrict its operation.



How to Install the Cord Cleat

The cord cleat is used to tie excess cords out of reach of children. To avoid creating a possible strangulation hazard for children. The corded internal window covering must be installed in such a way that a loose cord cannot form a loop of 2200mm or longer at a height of less than 1600mm above floor level – to prevent a child from unwinding a cord from a cleat.

1. Position the cleat against the window frame in a place that is accessible to the user, whilst remaining inaccessible to small children.
2. Use a drill to fasten the cleat with the two screws provided. This device will not prevent strangulation if young children wrap pull cords around their necks.

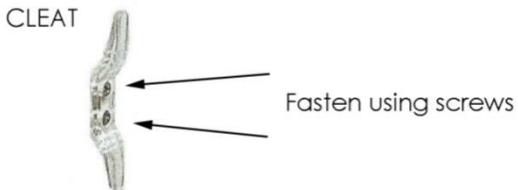

Young children have died by wrapping loose curtain and blind cords or chains around their necks.
Secure cords or chains with cord guides or keep them out of reach by winding them around a cleat.
Move cots and furniture away from window covering cords or chains.

WARNING



Young children can strangle in the loop of pull cords, chain and bead cords, and cords that run through window coverings. They can also wrap cords around their necks.

To avoid strangulation and entanglement, keep cords out of the reach of young children. Also,

1. install safety devices that remove the cord loop or reduce access to cords, and
2. move cots and furniture away from window covering cords.

WARNING REGARDING CLEATS

Cleats should be mounted at a sufficient height, so as to keep cords out of the reach of young children. Cords must be fully wrapped around the cleat at all times. Always keep cords out of the reach of young children.

WARNING FOR CORD RELEASE DEVICE

This cord release device reduces the strangulation hazard in the pull cord by removing the permanent loop. The cords should not be tied together and the cords should not be twisted around each other when the device is assembled. This device will not prevent strangulation if young children wrap pull cords around their necks. Always keep cords out of the reach of young children.