
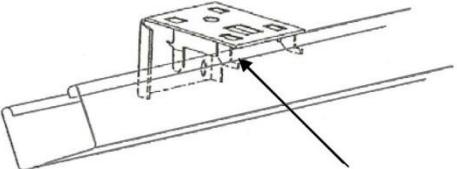


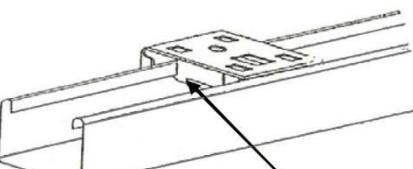

Prepare Yourself	A Phillips Screw Driver or Cordless Drill Good Quality Metal Tape Measure	Pencil Step Ladder
------------------	--	-----------------------

What's Included	Brackets and Screws Cleat
-----------------	------------------------------


Fixing into Plaster	If you are installing on plaster or wallboard, where possible, use a stud finder to fix into the timber stud. Alternatively, use a suitable wall mate or plaster toggle if you are unable to locate the stud.
---------------------	---

Installing The Blind	
1. Brackets are to be positioned approximately 100mm from each end of the blind. Any other brackets should be positioned evenly between the end brackets.	2. Use a pencil to mark the bracket positions and then screw through the top of each bracket into either the recess of the window frame where marked, or the front of the window frame for a face fit.
3. To install the blind, hold the blind underneath the brackets and position the front lip of the head rail over the front hooks of the brackets.   Hook in the front edge of the Blind first	4. Gently push back on the headrail and get the rear of the headrail to hook under the rear lip of the bracket. With larger blinds you may need to work from the right side and to the left.   Push the Blind up into the rear bracket hooks

Hold Down Clips	Fit hold down clips if desired. Fully lower the blind to determine the position of the hold down clips at the base of the window. Secure the hold down clips with the screws provide.  <i>Note: Make sure that the blades are in the open position when the blind is being raised or lowered. Failure to do so may cause damage to the blind or restrict its operation.</i>
-----------------	---

**Child Safety**

The Tension Device is required to be fixed to a wall or window frame to reduce the chance of strangulation of young children who may be able to fit through the controls. Position the child safety tension device so that it does not interfere with the blinds operation. Make sure the chain is not twisted. Hook the chain into the device and screw device into place. Ensure there is sufficient tension on the chain, but do not make it too tight that the operation of the blind is no longer smooth.

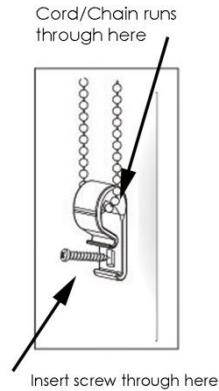**⚠️ WARNING**

Young children can strangle in the loop of pull cords, chain and bead cords, and cords that run through window coverings. They can also wrap cords around their necks. To avoid strangulation and entanglement, keep cords out of the reach of young children. Also,

1. Install safety devices that remove the cord loop or reduce access to cords, and
2. Move cots and furniture away from window covering cords.

The tension device reduces the hazards of strangulation or entanglement by limited access to the cord or bead chain. Anchor the device with the cord or bead chain to the wall or floor so young children cannot pull the cord or bead chain around their necks. Always keep cords out of the reach of young children.



Looped cords, looped bead chains or other flexible looped devices  
may cause a strangulation hazard for children under 5 years.  
KEEP CORDS AND CHAINS OUT OF REACH OF CHILDREN.