





Prepare Yourself	A Phillips Screw Driver/Cordless Screw Driver Good Quality Metal Tape Measure	Pencil Step Ladder
------------------	--	-----------------------

What's Included	Brackets and Screws Child Safety Hold Down Clip
-----------------	--

The Brackets x 2	You will receive 2 brackets. One is the Neutral or Pin End Side (the female bracket) 	One is the Chain control Side with the cross (the male bracket) 
------------------	---	---

Recess Mount	Face Mount
<p>Check the side that the operating chain is on and hold the chain control bracket hard up against the inside of your window frame and mark two screw holes with a pencil.</p> 	<p>Hold both brackets to the edge of your frame/architrave and mark with a pencil where the two screw holes need to be.</p> 
<p>Remove the bracket and drill a small 2mm hole where marked. Repeat with Pin End Bracket.</p> 	<p>Remove the brackets and drill a small 2mm hole where marked for both brackets.</p> 

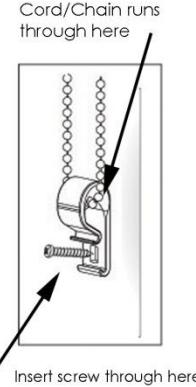

<p>Screw brackets into position</p> 	<p>Fix the brackets on to the window frame.</p> 
<p>Install the blind</p>	<p>Pick up the blind and insert the chain winder end (into the cross in the bracket). Then push the blind back towards the pin end bracket and line up the holes until the blind clicks in.</p>
<p>Child Safety</p>	<p>The Tension Device is required to be fixed to a wall or window frame to reduce the chance of strangulation of young children who may be able to fit through the controls. Position the child safety tension device so that it does not interfere with the blinds operation. Make sure the chain is not twisted. Hook the chain into the device and screw device into place. Ensure there is sufficient tension on the chain, but do not make it too tight that the operation of the blind is no longer smooth.</p> 

⚠ WARNING

Young children can strangle in the loop of pull cords, chain and bead cords, and cords that run through window coverings. They can also wrap cords around their necks. To avoid strangulation and entanglement, keep cords out of the reach of young children. Also,

1. Install safety devices that remove the cord loop or reduce access to cords, and
2. Move cots and furniture away from window covering cords.

The tension device reduces the hazards of strangulation or entanglement by limited access to the cord or bead chain. Anchor the device with the cord or bead chain to the wall or floor so young children cannot pull the cord or bead chain around their necks. Always keep cords out of the reach of young children.



Looped cords, looped bead chains or other flexible looped devices may cause a strangulation hazard for children under 5 years.
KEEP CORDS AND CHAINS OUT OF REACH OF CHILDREN.

Email us at: enquiries@todayblinds.com.au

www.todayblinds.com.au